


MONOBLOCK VALVES - DISTRIBUIDORES MONOBLOQUES


DISTRIBUIDOR MONOBLOQUE

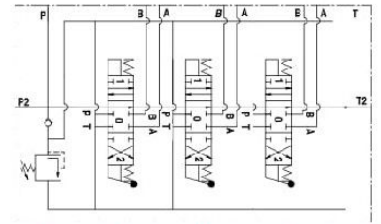

Code Code Código	Type Type Tipo	N° Levers Sections No. Nr. Palancas	Orifices - Threads - Orificios					PN bar	P MAX U bar	P MAX S bar	L	I	kg
			A-B BSP	P BSP	T BSP	P2 BSP	T2 BSP						
DBM2111001	BM 40/1/GU/MO A1	1									90	55	2,50
DBM2211001	BM 40/2/GU/MO A1x2	2									125	90	3,70
DBM2311001	BM 40/3/GU/MO A1x3	3									160	125	5,00
DBM2411001	BM 40/4/GU/MO A1x4	4									195	160	6,20
DBM2511001	BM 40/5/GU/MO A1x5	5	3/8"	3/8"	3/8"	1/2"	1/2"	250	320	80	230	195	7,40
DBM2611001	BM 40/6/GU/MO A1x6	6									265	230	8,60
DBM2711001	BM 40/7/GU/MO A1x7	7									300	265	9,80
DBM2811001	BM 40/8/GU/MO A1x8	8									335	300	11,00

P MAX S = Pression maxi sur le retour - Max. pressure in tank-line - Presión Max. al retorno

LES CODES CORRESPONDENT A - THESE CODES AND PRICES REFER TO - LOS CODIGOS SE REFIEREN A LOS MODELOS DE:
 DOUBLE EFFET - 3 POSITIONS - RAPPEL RESSORT - A/B FERMEE - ORIFICES BSP - PREDISPOSITION POUR CENTRE A SUIVRE
 DOUBLE ACTING TYPE - 3 POSITIONS - SPRING RETURN - A/B PORTS CLOSED - BSP THREADS - MACHINED FOR CARRY-OVER
 DOBLE EFECTO - 3 POSICIONES - RETORNO POR MUELLE - A/B CERRADOS - ROSCAS BSP - PREPARADO PARA RETORNO A PRESION (CARRY-OVER)

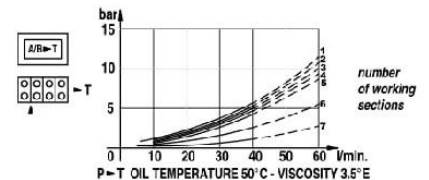

**SUR DEMANDE
ON REQUEST - BAJO PEDIDO**

commande manuelle + télex
manual operator with cam
accionamiento manual con leva

levier de sécurité
safety lever
palanca de seguridad

double commande
joystick
joystick

commande pneumatique
pneumatic operator
accionamiento neumático

microswitch
microinterruptor

centre a suivre
power beyond (carry over)
retorno a presión (carry over)


centre fermé
closed center plug
centro cerrado

BM40 da 1 a 7 leve

BM40 from 1 to 7 levers

Caratteristiche generali / Technical characteristics



	l/min	GPM
• Portata nominale / Nominal flow	35	9
• Portata limite / Max flow	45	12
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione max sugli utilizzi / Max pressure on ports	320	4700
• Contoppressione max allo scarico / Max pressure in tank-line	80	1100

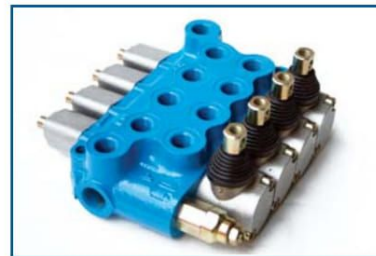

P-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

P-A/B - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

A/B-T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

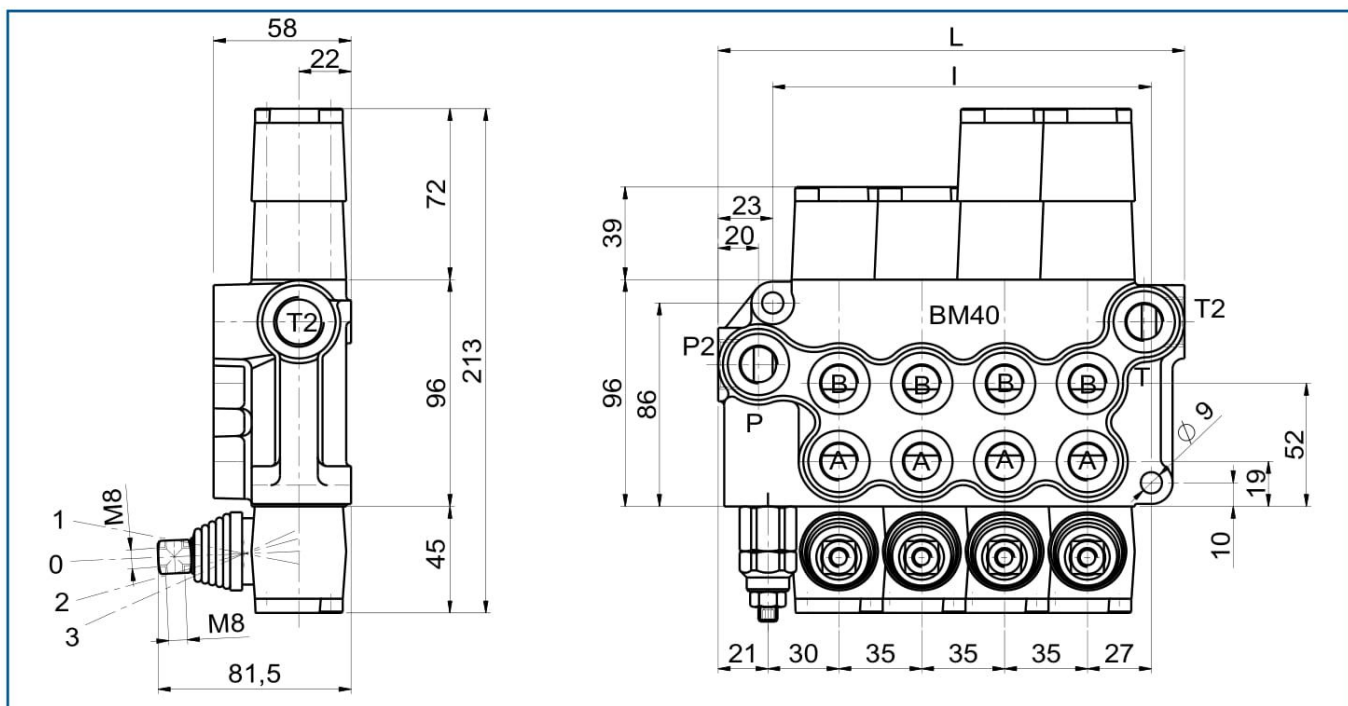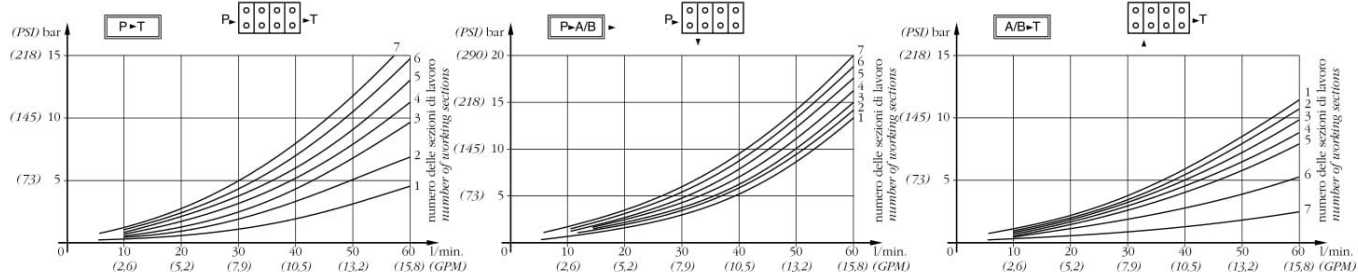

MOD	L	I	Kg
BM40/1	90	55	2,5
BM40/2	125	90	3,7
BM40/3	160	125	5
BM40/4	195	160	6,2
BM40/5	230	195	7,4
BM40/6	265	230	8,6
BM40/7	300	265	9,8

FILETTATURA STANDARD - STANDARD THREADS

COD	A-B	P	T	P ₂	T ₂
G	3/8"	3/8"	3/8"	1/2"	1/2"
F	3/4" - 16	3/4" - 16	3/4" - 16	7/8" - 14	7/8" - 14

◀ Su richiesta filettature diverse
Other threads available on request

