


BKP0.5B0



End cover: G1/4 thread depth 12.
To mount the pump, n.2 M5 screws, with a torque wrench setting fixed at 5.4 ± 0.5 Nm.

INLET

OUTLET

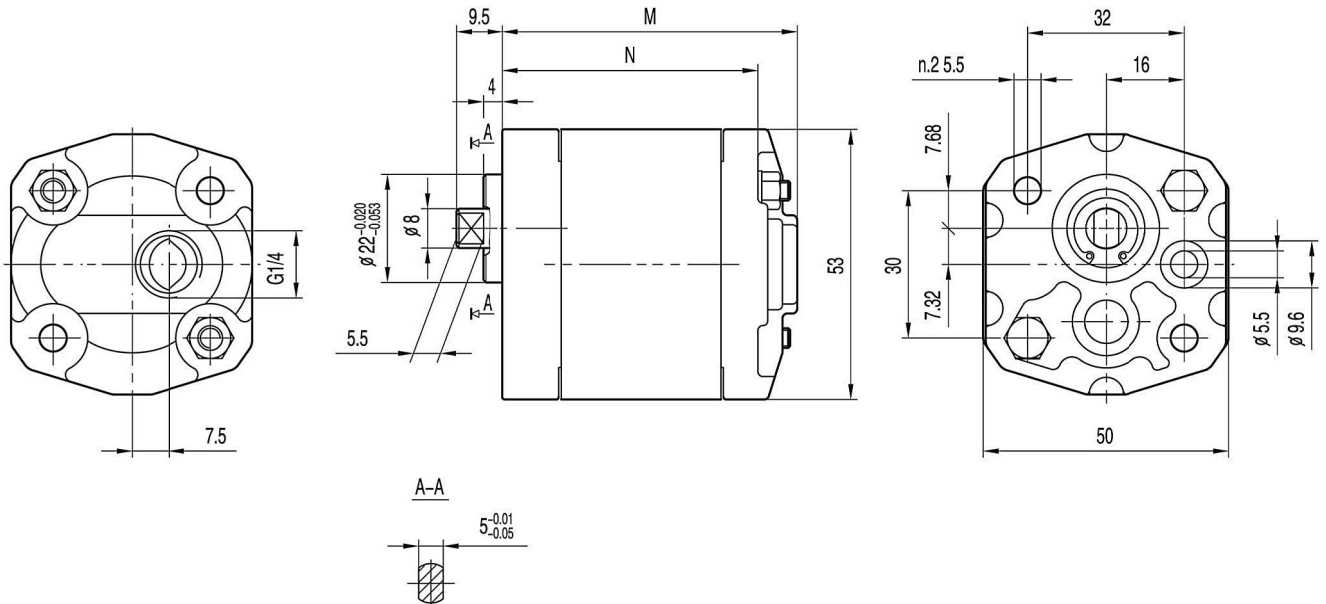


Type	Displacement (cm ³ /rev)	Max pressure			Max. speed (r/min)	Min. speed (r/min)	Dimensions	
		P1 bar	P2 bar	P3 bar			M mm	N mm
BKP0.5B0-D-0.19	0.19	200	230	250	7000	1000	60	51
BKP0.5B0-D-0.26	0.26	200	230	250	7000	1000	60.5	51.5
BKP0.5B0-D-0.38	0.38	200	230	250	7000	1000	61.5	52.5
BKP0.5B0-D-0.50	0.50	200	230	250	7000	1000	62.5	53.5
BKP0.5B0-D-0.65	0.65	200	230	250	7000	1000	63.5	54.5
BKP0.5B0-D-0.75	0.75	200	230	250	7000	1000	64.5	55.5
BKP0.5B0-D-0.88	0.88	200	230	250	7000	1000	65.5	56.5
BKP0.5B0-D-1.00	1.00	200	230	250	6000	850	66.5	57.5
BKP0.5B0-D-1.25	1.25	200	230	250	5000	700	68.5	59.5
BKP0.5B0-D-1.50	1.50	200	230	250	4000	600	70.5	61.5
BKP0.5B0-D-1.75	1.75	180	210	230	4000	600	72.5	63.5
BKP0.5B0-D-2.00	2.00	160	190	210	3000	500	74.5	65.5


BKP0.5

FRONT COVER


SHAFTS

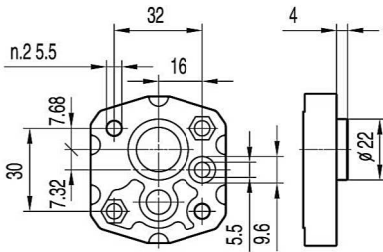

B0




G0




C0

Max.Torque 10 Nm


Max.Torque 8 Nm

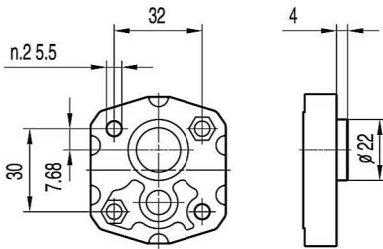

B1




G0




C0

Max.Torque 10 Nm


Max.Torque 8 Nm

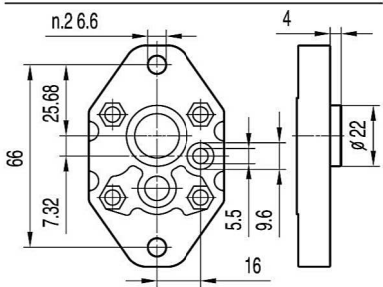

A0




G0




C0

Max.Torque 10 Nm


Max.Torque 8 Nm

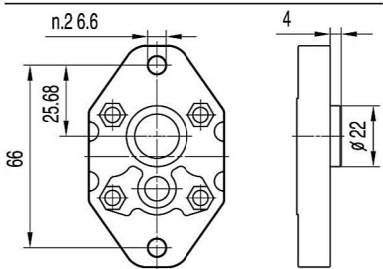

A1



G0




C0

Max.Torque 10 Nm

Max.Torque 8 Nm


BKP0.5

PORTS




Z0

TYPE	INLET	OUTLET
	A	a
BKP0.5...0.19 ÷ BKP0.5...2.00	M10x1	M10x1




L0

TYPE	INLET	OUTLET
	A	a
BKP0.5...0.19 ÷ BKP0.5...2.00	G1/4	∅ 5.5



L1

TYPE	INLET	OUTLET
	A	a
BKP0.5...0.19 ÷ BKP0.5...2.00	G3/8	∅ 5.5



L2

TYPE	INLET	OUTLET
	A	a
BKP0.5...0.19 ÷ BKP0.5...2.00	G1/4	G1/4